



Yuasa Technical Data Sheet

Yuasa YBX3780 - YBX3000 SMF Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 74Ah |
| Cold Cranking Amps (EN1) | 740A |

Dimensions

| | |
|--------|-------|
| Length | 260mm |
| Width | 183mm |
| Height | 185mm |



Weights & Measures

| | |
|-----------------------|-----|
| Mean Weight with Acid | -kg |
| Dry Weight | - |
| Acid Volume | - |

Container Features


| | |
|---------------------------|-----------------|
| Case Type | US Group 78R FT |
| Cell Layout | 1 |
| Hold Down | B1 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | - |
| Lid Type | SMF Double Lid |

Technology

| | |
|-------------------------|-------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 4A |

Cell Assembly Layout

Battery Hold-down

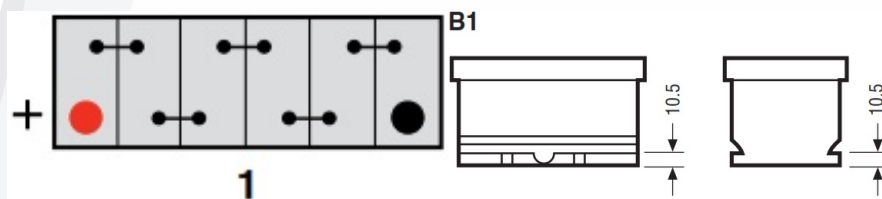

Data Sheet generated on 24/06/2019 - E&OE