



Yuasa Technical Data Sheet

Yuasa YBX9012 - YBX9000 AGM Start Stop Plus Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 50Ah |
| Cold Cranking Amps (EN1) | 520A |

Dimensions

| | |
|--------|-------|
| Length | 207mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 15.9kg |
| Dry Weight | - |
| Acid Volume | - |



Container Features

| | |
|---------------------------|------------|
| Case Type | L1 DIN AGM |
| Hold Down | B3 |
| State of Charge Indicator | - |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | ✓ |
| Lid Type | VRLA |


Technology

| | |
|-------------------------|------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca VRLA |
| Separator | AGM |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 3A |


Terminal Type

T1


Standard DIN Post

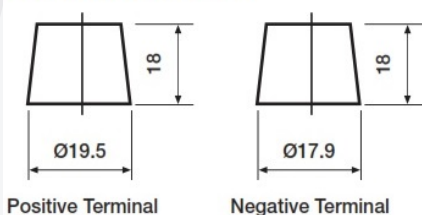

Cell Assembly Layout

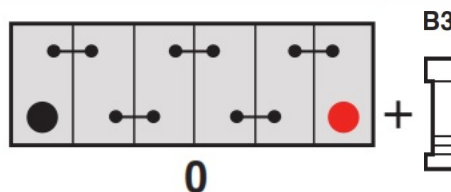

Battery Hold-down

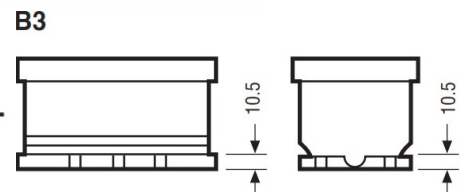

Data Sheet generated on 24/06/2019 - E&OE